



HM UF 80 PVDF-*i flo* Ultrafiltration Module

- With pre-engineered integrated header
- Compact modular design with reduced footprint
- Easy to install with flexibility to adapt & extend
- Versatile & reliable design

Membrane Specifications:

Model		HM UF 80 PVDF- <i>i flo</i>
Type		Hollow Fiber Ultrafiltration
Material		Modified PVDF
Nominal Pore Size	nm (μ)	30 (0.03)
MWCO	Dalton	100,000
Fiber Bore Diameter (Inner)	mm	0.8
Fiber Bore Diameter (Outer)	mm	1.4
Housing & End Cap (MOC)		UPVC


Module Data:

Membrane Surface Area (Active)	m ²	80
Outer Diameter Housing	mm	250
Nozzels (Vactaulic End)	mm	DN150 & DN50
Empty Weight With End caps	kgs	78

Operational Data:

Mode of Operation		Out to In (Dead End / Cross Flow)
Operating Flux Range	gfd (lmh)	26 - 105 (45 - 180)
Operating Temperature	°C	5 - 40
Feed Pressure Operating Range	Bar	2.0 - 3.0
Feed Pressure Maximum @ 25°C	Bar	5
Trans membrane Pressure	bar	0.4 - 2
pH Range Operation		2.0 - 11.0
Maximum NaOCl	mg/l	2000
Particle Dimension	μ	< 300
Total Suspended Solid (TSS)	ppm	50 (max 80)
Max Feed Turbidity	NTU	50 (max 250)
Oil & Grease		Nil

M10x55LG.BOLT

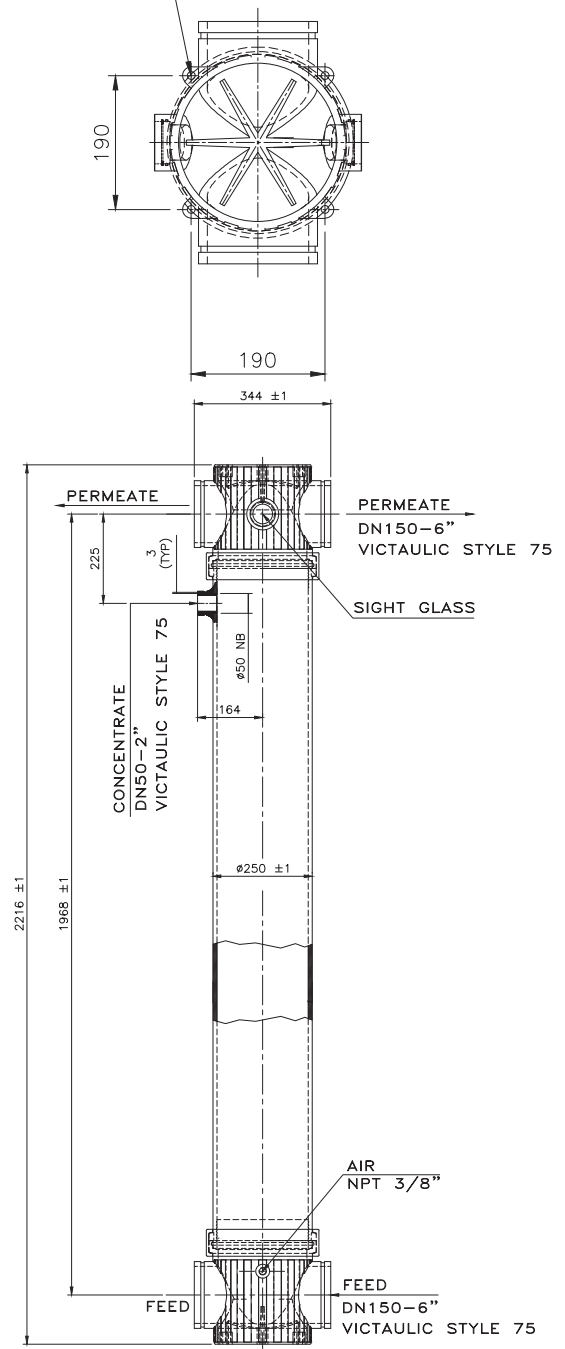

Performance Details:

Filtrate Flow Range	gpm (m ³ /hr)	15.84 - 63.38 (3.6 - 14.4)
Filtrate SDI		≤ 2.5
Filtrate Turbidity	NTU	≤ 0.2
Bacteria Reduction	Log	6
Virus Reduction	Log	4

Process Data:

Backwash Flux	gfd (lmh)	59 - 88 (100 - 150)
Backwash Pressure	Bar	2.5 max
Air scouring flowrate	Nm ³ /h	12 - 15 (max 20)
Chemically Enhanced Backwash (CEB):		
NaOH	mg/l	500
HCL	mg/l	1000
NaOCl	mg/l	1000

Note:

Backwash / CEB / CIP frequency & duration shall be as per the design based on the feed water source, quality & fluctuations

Important Warnings & Information:

- For the recommended design range & guidelines, please follow this technical bulletin or call an application specialist. If the operating limits given in this product information bulletin are not strictly followed, the warranty will be null and void.
- The customer is fully responsible for the effects of chemicals that are incompatible with the membrane modules.

To the best of our knowledge, the information contained in this publication is accurate. Ion Exchange (India) Ltd., maintains a policy of continuous development and reserves the right to amend the information given herein without notice. Please contact our regional/branch office for current product specification.

 is the registered trademark of Ion Exchange (India) Ltd.



ION EXCHANGE (INDIA) LTD.

Corporate Office

Ion House, Dr. E. Moses Road, Mahalaxmi,
Mumbai - 400011 | Tel: +91 22 6231 2000
E-mail: ieil@ionexchange.co.in

International Division

R-14, T.T.C MIDC, Thane - Belapur Road, Rabale,
Navi Mumbai - 400 701 | Tel: +91 22 6857 2400
E-mail: export.sales@ionexchange.co.in

Regional and Branch Offices

Bengaluru | Bhubaneswar | Chandigarh | Chennai
Delhi | Hyderabad | Kolkata | Lucknow | Vadodara
Vashi | Visakhapatnam

Overseas Offices

Bangladesh | Canada | Indonesia | Kenya
Malaysia | Oman | Portugal | Saudi Arabia | Singapore
South Africa | Sri Lanka | Tanzania | Thailand | UAE | USA

Manufacturing Units

India - Ankleshwar | Hosur | Patancheru | Rabale | Verna | Wada

Overseas - Bangladesh | Indonesia | Saudi Arabia | UAE

All India Service and Dealer Network

www.ionexchangeglobal.com | www.hydrademem.com

